

AL116

Compact High Brightness Bar Light



- 4i) High intensity light in a small package - only 32.2 mm (1.27") wide
- 4i) Convenient M4 nut channel for mounting


Ordering Information

Standard Product:
Shipped Next Day

Standard Product Variation:
Shipped Within Two Weeks


AL116-WHIC

Configured with inline
Current Source

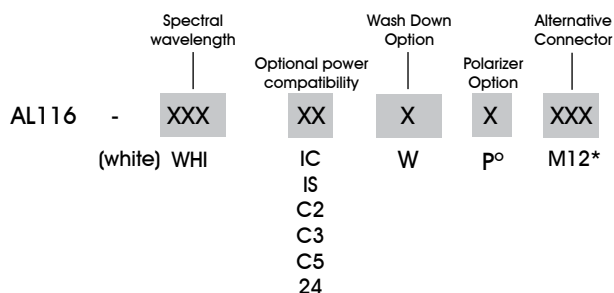


IC = ICS (requires 24v power supply)
 IS = ISU (requires 24v power supply)
 C2 = Ai Connector
 C5 = Pulsar 320 Connector
 * Available with IC, IS, and 24v options only
 o Not available in combination with the Wash Down Option

Dimensional Information

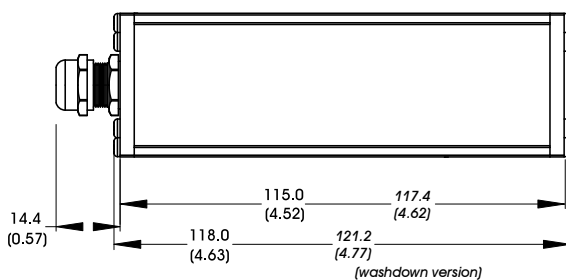


Cable Length: 1.5 Meter (59")

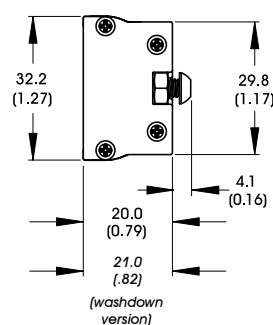

DIMENSIONS ARE IN MILLIMETERS (INCHES)

[Click for Installation Models & Drawings](#)

Current Requirements



Standard Product Information

Product Lifetime: 50,000 hours

Operating Temperature: 0-60° C