

AL126

Compact High Brightness Bar Light



- 4i)** High intensity light in a small package - only 20mm (.79") wide.
- 4i)** Convenient M4 nut channel for mounting


Ordering Information

Standard Product:
Shipped Next Day

AL126-WHIC


Configured with inline
Current Source

Standard Product Variation:
Shipped Within Two Weeks

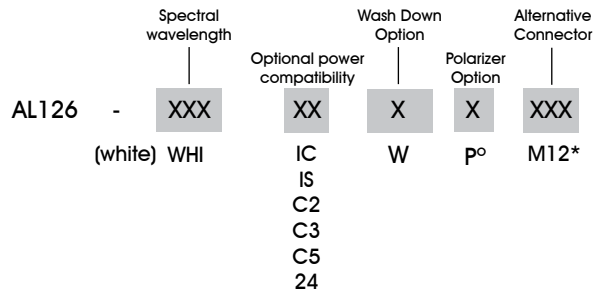

IC = ICS (requires 24v power supply)
 IS = ISU (requires 24v power supply)
 C2 = Ai Connector
 C5 = Pulsar 320 Connector
 * Available with IC, IS, and 24v options only
 o Not available in combination with the Wash Down Option

Dimensional Information

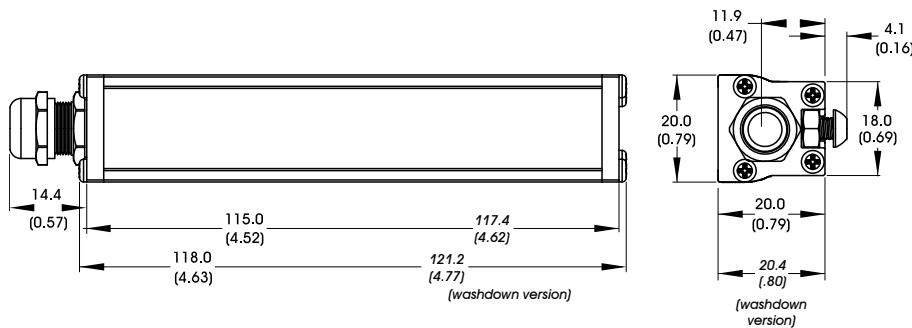

[Click for Installation Models & Drawings](#)

Cable Length: 1.5M (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Current Requirements



Standard Product Information

Product Lifetime: 50,000 hours

Operating Temperature: 0-60° C