

EL115


Expandable Wash-Down Linear Array



- Aii** Linear illumination in a NEMA 4X grade, field-replaceable enclosure
- Aii** Available in 2" increments up to 92"
- Aii** *Strobe only*

Ordering Information

Standard Product Variation:
Shipped Within Two Weeks

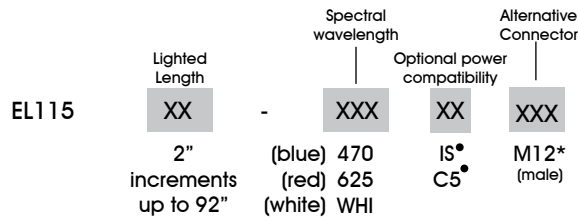


IS = ISU (requires 24v power supply)
C5 = Pulsar 320 Connector
* Available with IS option only
● Not available with all lengths

Built-to-order lights are non-returnable.

Dimensional Information

EL115	
PART NUMBER	LENGTH IN MM
EL11504	172.5 (6.8)
EL11506	223.3 (8.8)
EL11508	274.1 (10.8)
EL11510	324.9 (12.8)
EL11512	375.7 (14.8)
EL11514	426.5 (16.8)
EL11516	477.3 (18.8)
UP TO EL11592	2407.7 (94.8)

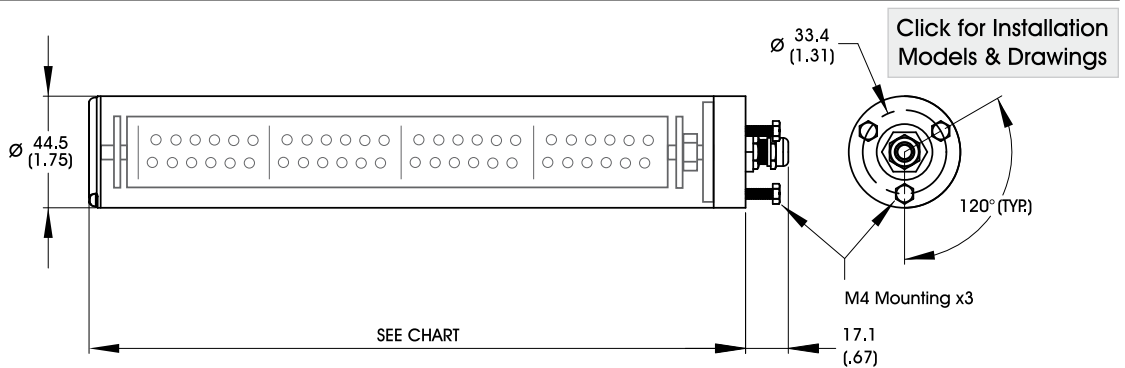


Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Current Requirements

Maximum draw per each 50mm (2") segment



Standard Product Information

Product Lifetime: Unlimited due to strobing

Operating Temperature: 0-60° C