

## PS24

### 24 Volt Power Supply

- Aii** Universal input switching supply.
- Aii** 24 v regulated current DC - runs on 110-220v AC.
- Aii** Power indicator light



#### Ordering Information

Standard Product:  
Shipped Next Day

Standard Product Variation:  
Shipped Next Day

**PS24**


P/N: PS24

PS24 - XX  
TL

Optional  
Tinned  
Leads

Input power:	90 VAC to 264 VAC universal; AC input frequency: 47 Hz to 60 Hz
Output power:	30 watts
Over voltage protection:	150% max., non-condensing
Over current protection:	Fully short circuit protected
MTBF:	50,000 hrs. at full load and 25 C
Safety compliance:	UL1950[E127643]; CSA 22.2 234 [LR56927-121]; TUV EN60950 [S9452057]; MITI [91-54488], [91-54489]
Operating temperature:	0 to 40 degrees centigrade

#### Dimensional Information

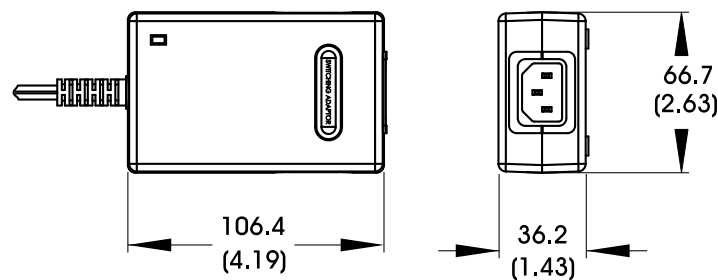

DIMENSIONS ARE IN MILLIMETERS (INCHES)

#### Additional Information

The PS24 is designed for use with most Ai electronics.  
The PS24-TL is designed for use with CS100, CS100-IC, CS300 and CS300-IC.

Includes US Cordset

#### Standard Product Information

Operating Temperature: 0-55° C



Meets CE standards