

# SL112

## Coaxial Spot Light



- 4i) Designed to replace fiber optic light sources in coaxial microscopes
- 4i) Compact light head provides efficient thermal management to promote long LED life.

### Ordering Information

Standard Product:  
Shipped Next Day

Standard Product Variation:  
Shipped Within Two Weeks


#### SL112-WHIIC

Configured with the inline current source.

Spectral wavelength	Optional power compatibility	Alternative Connector
SL112 - <b>XXX</b>	<b>XX</b>	<b>XXX</b>
(blue) 470 (green) 530 (amber) 590 (red) 625 (white) WHI	IC IS C2 C3 C5	M12*

IC = ICS (requires 24v power supply)  
 IS = ISU (requires 24v power supply)  
 C2 = Ai Connector  
 C3 = Pulsar 710 Connector  
 C5 = Pulsar 320 Connector  
 \* Available with IC and IS options only

### Dimensional Information

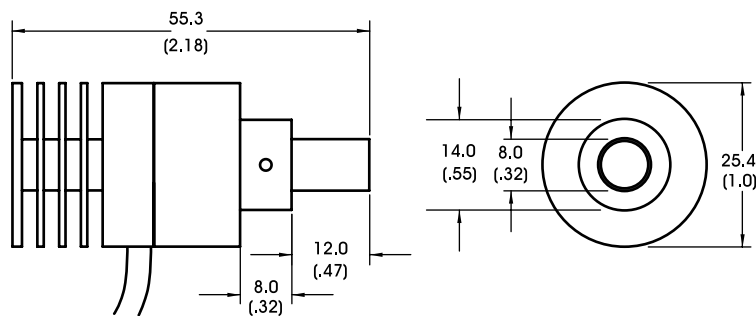

[Click for Installation Models & Drawings](#)

Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

#### Standard Variation Current Specifications

	blue	green	amber	red	infra-red	white	
@24	500	500	500	500	500	500	mA

#### Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C