

# SL6404

## High Current LED Spot Light



- Aii** High intensity illumination from a long distance.
- Aii** Available with built in strobe or wash down options.

### Ordering Information

Standard Product:  
Shipped Next Day

#### SL6404-WHI24


Configured for use with user supplied 24v regulated power supply.

Standard Product Variation:  
Shipped Within Two Weeks

	Spectral wavelength	Power Option	Wash Down	Alternative Connector
SL6404 -	XXX	XX	X	XXX
	(blue) 470	IC	W	M12*
	(green) 530	IS		
	(amber) 590	C2		
	(red) 625	C3		
	infrared 850	C5		
	(white) WHI	12		
		24		

IC = iCS (requires 24v power supply)  
 IS = ISU (requires 24v power supply)  
 C2 = Ai Connector  
 C3 = Pulsar 710 Connector  
 C5 = Pulsar 320 Connector  
 \* Available with IC, IS, and 24v options only  
 IS = Inline Strobe Unit

### Dimensional Information

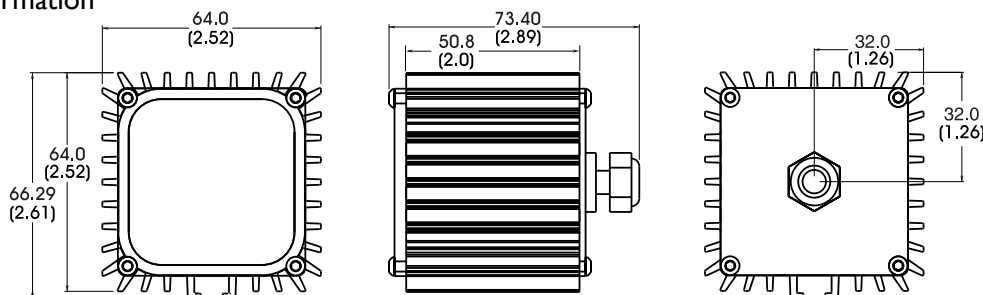

[Click for Installation Models & Drawings](#)

M6 NUT CHANNEL FOR MOUNTING  
(HARDWARE INCLUDED)

### Standard Variation Current Specifications

	blue	green	amber	red	infra-red	white	
@12	700	700	700	700	700	700	mA
@24	350	350	350	350	350	350	mA

### Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C